LANDSCAPE SPECIFICATIONS:

ALL SOD SHALL CONFORM TO THE STANDARDS OF THE NURSERY SOD GROWERS ASSOCIATION OF ONTARIO. ALL SODDED AREAS SHALL BE PREPARED WITH A MINIMUM OF 150MM OF TOPSOIL AND SODDED WITH #1 BLUEGRASS - FESCUE NURSERY SOD. ON SLOPES, LAY THE TURF PIECES HORIZONTALLY ACROSS THE SLOPE, STARTING AT THE BOTTOM. FOR AREAS WITH A 2:1 SLOPE OR GREATER STAKE SOD TO HOLD IN PLACE WITH 1/2" X 1" X 12" PEGS AT TWO-FOOT SPACINGS.

UNLESS SOIL TESTS SUGGEST OTHERWISE, FERTILIZER SHALL BE APPLIED AS FOLLOWS:
SODDED AREAS: 11-8-4 (11% NITROGEN, 8% PHOSPHOROUS, 4% POTASH) AT 4.5 KG/M$_2$.
PLANTING BEDS: 7-7-7 (7% NITROGEN, 7% PHOSPHOROUS, 7% POTASH) AT 0.12 KG/M$_3$, AND BONE MEAL AT 0.58 KG/M$_3$ OF PLANTING SOIL MIXTURE AS OUTLINED BELOW.

ALL PLANTING BEDS ARE TO BE CONTINUOUS, AND EXCAVATED TO A MINIMUM DEPTH OF 450MM UNLESS NOTED OTHERWISE. PLANTING BEDS ARE TO BE FILLED WITH A SOIL MIXTURE COMPOSED OF SIX (6) PARTS SAND LOAM, TWO (2) PARTS WELL ROTTED MANURE, AND ONE (1) PART PEAT MOSS, IN ADDITION TO THE FERTILIZERS SPECIFIED ABOVE.

ALL PLANT MATERIAL SHALL CONFORM TO THE STANDARDS OF THE CANADIAN NURSERY TRADES ASSOCIATION. ALL PLANT MATERIAL IS TO BE CLAY GROWN STOCK. INSTALL ALL PLANT MATERIAL AS SHOWN ON THE PLANTING PLAN AND DETAILS. USE ONLY VIABLE NURSERY STOCK GROWN IN STRICT ACCORDANCE WITH PROPER HORTICULTURAL PRACTICES WHICH IS FREE FROM DAMAGE, PESTS, AND DISEASE.

ALL BEDS ARE TO BE COVERED WITH A 150MM DEPTH OF CLEAN, SHREDDED PINE BARK MULCH BY GRO-BARK OR APPROVED EQUAL UNLESS NOTED OTHERWISE. GUYING AND STAKING OF TREES SHALL CONFORM TO THE PLANTING DETAILS. WRAP ALL DECIDUOUS TREES AS PER THE SPECIFICATIONS OF THE ONTARIO LANDSCAPE CONTRACTORS ASSOCIATION.

THE CONTRACTOR WILL OBSERVE PROPER MAINTENANCE PROCEDURES FOR ALL NEWLY CONSTRUCTED LANDSCAPE WORK AS PER SECTION 1E (MAINTENANCE WORK) OF LANDSCAPE ONTARIO'S SPECIFICATIONS. UNLESS OTHERWISE NOTED, THIS WILL APPLY DURING THE CONSTRUCTION PERIOD ONLY. THE CONTRACTOR SHALL MAINTAIN ALL PLANTING AND SODDING UNTIL FINAL ACCEPTANCE IS GRANTED BY THE LANDSCAPE ARCHITECT.

THE CONTRACTOR WILL BE RESPONSIBLE FOR THE PROTECTION OF ALL PLANT MATERIAL FROM DAMAGES RESULTING FROM WINTER CONDITIONS AS WELL AS RODENTS DURING THE WARRANTY PERIOD. APPLY "SKOOT" RODENT DETERRENT FORMULA (OR APPROVED EQUAL) TO ALL CONIFEROUS TREES AND ALL SHRUBS IN LATE OCTOBER AS PER MANUFACTURER'S DIRECTIONS.

THE CONTRACTOR SHALL PROVIDE A FULL ONE YEAR GUARANTEE (OR TWO YEARS IF REQUIRED BY THE MUNICIPALITY OR OWNER) ON ALL LANDSCAPE WORKS, BEGINNING ON THE DATE THAT FINAL ACCEPTANCE IS GRANTED BY THE LANDSCAPE ARCHITECT.

1 L2 Landscape Specifications
n.t.s.

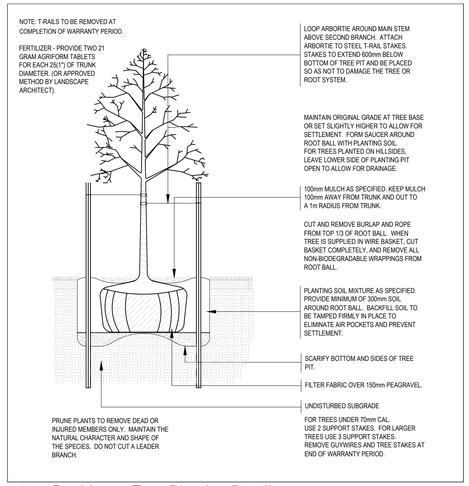

2 L2 Deciduous Tree Planting Detail
n.t.s.

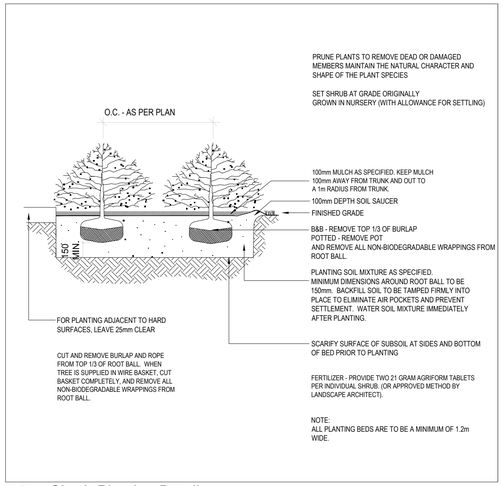

3 L2 Shrub Planting Detail
n.t.s.

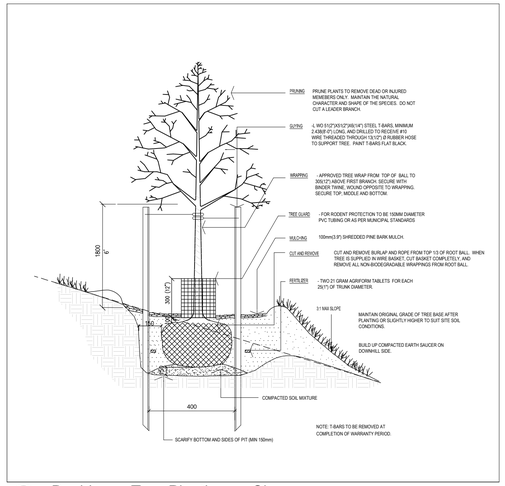

4 L2 Deciduous Tree Planting on Slope
n.t.s.

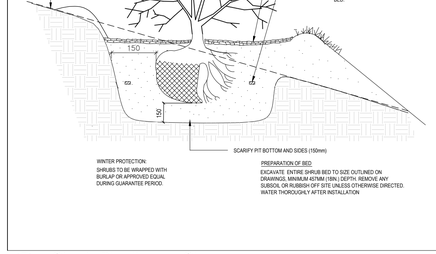

5 L2 Shrub Planting on Slope
n.t.s.

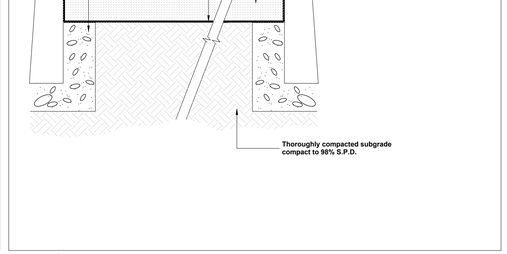

6 L2 Shredded Bark Mulch
n.t.s.

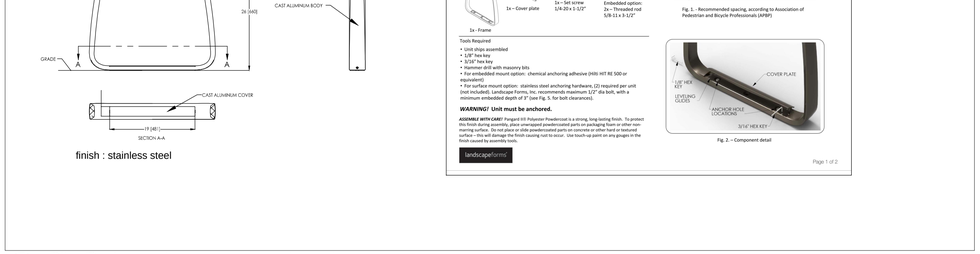

7 L2 Bike Rack - as shown or approved equal
n.t.s.

7 L2 Timber Screen Fence
n.t.s.

8 L2 Gravel Maintenance Strip
n.t.s.

REVISION BLOCK

#	DATE	DESCRIPTION
1	06/03/2020	ISSUED FOR SPA

GREG A. COSTA OALA
NOT FOR CONSTRUCTION

PLANNING
URBAN DESIGN
& LANDSCAPE
ARCHITECTURE
MHBC
230-7050 WESTON ROAD WOODBRIDGE, ON, L4L 8G7 | P: 905 761 5588 F: 905 761 5589 | WWW.MHBCPLAN.COM

Sobeys
4980 Tahoe Boulevard, Mississauga, Ontario
L4W 0C7

METRIC SCALE
AS NOTED

LANDSCAPE DETAILS

SOBEYS
FOODLAND - STAYNER
7595 HIGHWAY #26, STAYNER, ONTARIO

PROJECT No: 07159 DM | DRAWN BY: GC | CHECKED BY: GC

L-2